


# FAST AND COMPACT

# conga-TC97

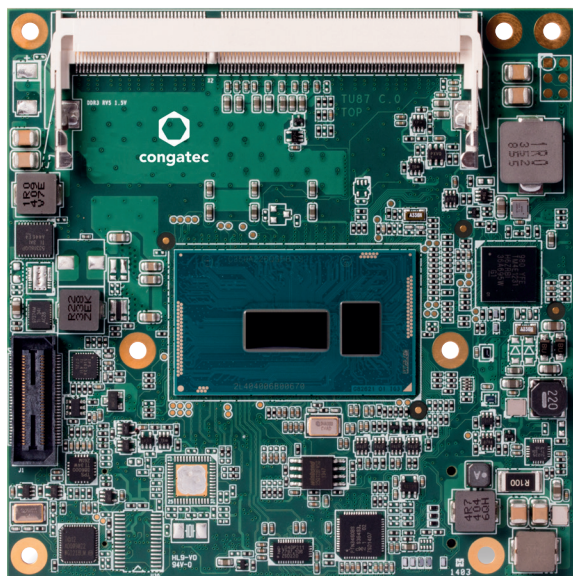


- 5<sup>th</sup> Gen. Intel® Core™ i7 dual core processor
- 3x DisplayPort 1.2, up to 4k resolution
- Intel® AVX 2.0 Vector extension for improved floating point computing
- COM Express Compact Type 6 module

**COM**  **Express®**

Formfactor	COM Express® Compact, (95 x 95 mm), Type 6 Connector Layout				
CPU	Intel® Core™ i7-5650U	2.2 GHz Dual Core	Turbo Boost 3.2 GHz	4 MB Cache	TDP 15W GT3 HD 6000
	Intel® Core™ i5-5350U	1.8 GHz Dual Core	Turbo Boost 2.9 GHz	3 MB Cache	TDP 15W GT3 HD 6000
	Intel® Core™ i3-5010U	2.1 GHz Dual Core		3 MB Cache	TDP 15W HD 6000
	Intel® Celeron® 3765U	1.9 GHz Dual Core		2 MB Cache	TDP 15W
	Intel® Turbo Boost Technology   Intel® Hyper-Threading Technology (Intel® HT Technology)   Intel® Advanced Vector Extensions 2.0 (Intel® AVX2)   Intel® Advanced Encryption Standard New Instructions (Intel® AES-NI)   Integrated dual channel memory controller   up to 25.6 GByte/sec. memory bandwidth   Integrated Intel® HD Graphics 6000 series with dynamic frequency up to xxGHz, Intel® Clear Video HD Technology   Intel® Virtualization Technology (Intel® VT)   Intel® Trusted Execution Technology (Intel® TXT)   Intel® Streaming SIMD Extensions 4.2 (Intel® SSE4.2)   PCLMULQDQ Instruction   Intel® Secure Key, Intel® Transactional Synchronization Extensions (Intel® TSX)				
DRAM	2 Sockets, SO-DIMM DDR3L@1.35V up to 1600MT/s and 32GByte				
Chipset	Integrated PCH-LP				
Ethernet	Intel® I218-LM GbE LAN Controller with AMT 10 support				
I/O Interfaces	4x PCI Express™ GEN. 2.0 lanes   4x Serial ATA® RAID 0/1/5/10 support 2x ExpressCard®   2x USB 3.0 (XHCI)   8x USB 2.0 (EHCI)   LPC bus   I²C bus (fast mode, 400 kHz, multi-master)				
Sound	Digital High Definition Audio Interface with support for multiple audio codecs				
Graphics	Next Generation Intel® HD Graphics with OpenCL 2.0, OpenGL 4.0 and DirectX11.1 support   up to three independent displays: HDMI 1.4, DVI, DisplayPort 1.2   High performance hardware MPEG-2 decoding, WMV9 (VC-1) and H.264 (AVC) support Blu-ray support @ 40 MBit/s				
LVDS	Dual channel LVDS transmitter   Supports flat panels 2x24 Bit interface   VESA mappings   resolutions up to 1920x1200, Automatic Panel Detection via EDID/EPI				
Digital Display Interface (DDI)	2x TMDS (HDMI) / DisplayPort 1.2a with support for Multi-Stream Transport (MST), resolutions up to 4k				
congatec Board Controller	Multi Stage Watchdog   non-volatile User Data Storage   Manufacturing and Board Information   Board Statistics   BIOS Setup Data Backup   I²C bus (fast mode, 400 kHz, multi-master)   Power Loss Control				
Embedded BIOS Features	AMI Aptio® UEFI 2.x firmware   8/16 MByte serial SPI firmware flash				
Security	The conga-TC97 can be optionally equipped with a discrete "Trusted Platform Module" (TPM 1.2 / 2.0). It is capable of calculating efficient hash and RSA algorithms with key lengths up to 2,048 bits and includes a real random number generator. Security sensitive applications such as gaming and e-commerce will benefit also with improved authentication, integrity and confidence levels.				
Power Management	ACPI 4.0 with battery support				
Operating Systems	Microsoft® Windows 8   Microsoft® Windows 7   Linux   Microsoft® Windows embedded Standard				
Power Consumption	Typ. application: tbd.   see User's Guide for full details   CMOS Battery Backup Ultra low standby power, support for CPU power states up to C10				
Temperature	Operating: 0 .. +60°C Storage: -20 .. +80°C				
Humidity	Operating: 10 - 90% r. H. non cond. Storage: 5 - 95% r. H. non cond.				
Size	95 x 95 mm (3.74" x 3.74")				



# conga-TC97 | Block diagram

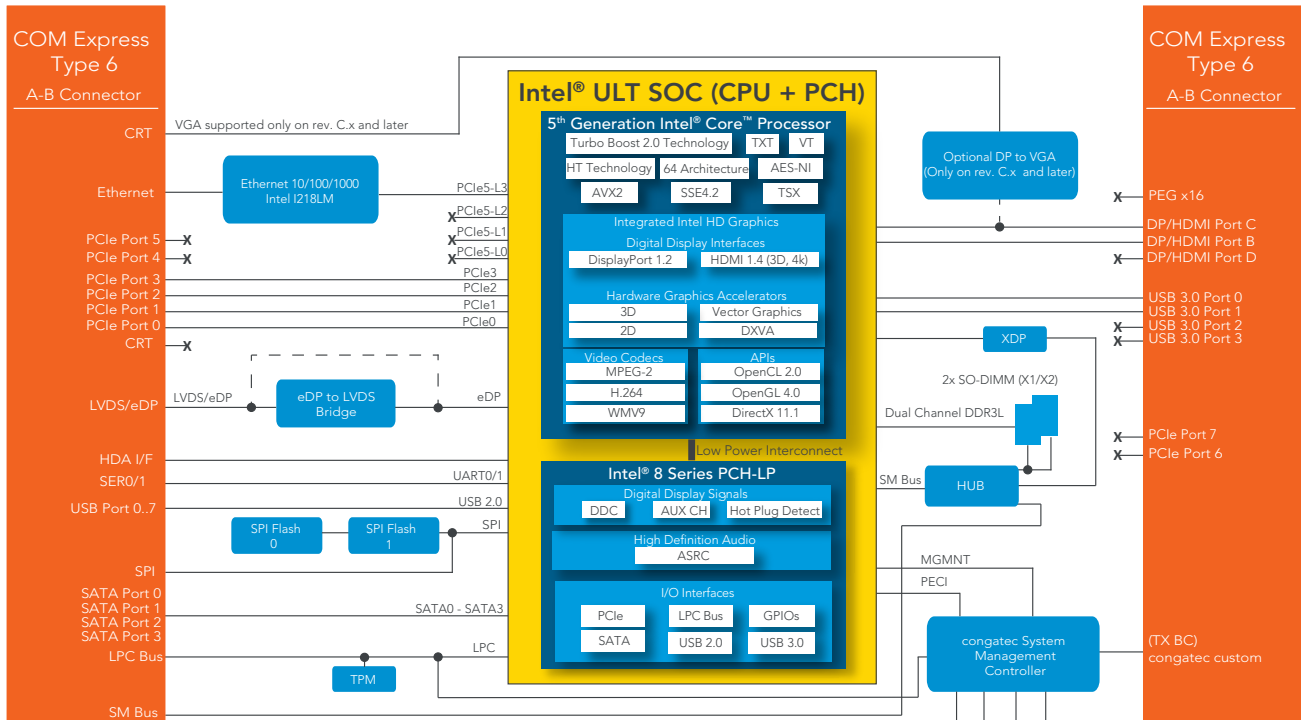

# conga-TC97 | Order Information

Article	PN	Description
conga-TC97/i7-5650U	045103	COM Express Type 6 Compact module with Intel® Core™ i7-5650U dual core processor with 2.2GHz, 4MB L2 cache and 1600MT/s dual channel DDR3L memory interface.
conga-TC97/i5-5350U	045104	COM Express Type 6 Compact module with Intel® Core™ i5-5350U dual core processor with 1.8GHz, 3MB L2 cache and 1600MT/s dual channel DDR3L memory interface.
conga-TC97/i3-5010U	045105	COM Express Type 6 Compact module with Intel® Core™ i3-5010U dual core processor with 2.1GHz, 3MB L2 cache and 1600MT/s dual channel DDR3L memory interface.
conga-TC97/3765U	045106	COM Express Type 6 Compact module with Intel® Celeron® 3765U dual core processor with 1.9GHz, 2MB L2 cache and 1600MT/s dual channel DDR3L memory interface.
conga-TC97/HSP-B	046953	Standard heatspreader for COM Express module conga-TC97. All standoff are with 2.7mm bore hole.
conga-TC97/HSP-T	046954	Standard heatspreader for COM Express module conga-TC97. All standoff are M 2.5 threaded.
conga-TC97/CSP-B	046951	Standard passive cooling solution for COM Express module conga-TC97. All standoff are with 2.7mm bore hole.
conga-TC97/CSP-T	046952	Standard passive cooling solution for COM Express module conga-TC97. All standoff are M 2.5 threaded
DDR3L-SODIMM-1600 (2GB)	068755	DDR3L SODIMM memory module with 1600 MT/s (PC3L-12800S) and 2GB RAM
DDR3L-SODIMM-1600 (4GB)	068756	DDR3L SODIMM memory module with 1600 MT/s (PC3L-12800S) and 4GB RAM
DDR3L-SODIMM-1600 (8GB)	068757	DDR3L SODIMM memory module with 1600 MT/s (PC3L-12800S) and 8GB RAM

## Accessories

conga-TEVAL	065800	Evaluation carrier board for Type 6 COM-Express-modules
conga-LDVI/EPI	011115	LVDS to DVI converter board for digital flat panels with onboard EEPROM
COM-Express-carrier-board-Socket-5	400007	Connector for COM-Express carrier boards, height 5mm, packing unit 4 pieces
COM-Express-carrier-board-Socket-8	400004	Connector for COM-Express carrier boards, height 8mm, packing unit 4 pieces

© 2015 congatec AG. All rights reserved.

All data is for information purposes only. Although all the information contained within this document is carefully checked, no guarantee of correctness is implied or expressed. Product names, logos, brands, and other trademarks featured or referred are the property of their respective trademark holders. These trademark holders are not affiliated with congatec AG. Rev. Juli 1, 2015 MR

